

RT REGATA...ROLLER BEARING BLOCKS

RT60 LOW LOAD

型番	シーブ径	シャックル径	ロープ最大径	安全強度	破断強度	最大長	重量	形容	価格
	[mm]	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT60SL	60	8	12	1400	2800	112	180	single	22,200.
RT60SAL	60	8	12	1400	2800	135	210	single, becket	29,000.
RT60DL	60	8	12	1400	2800	112	280	double	39,800.
RT60DAL	60	8	12	1400	2800	135	310	double, becket	43,900.
RT60TL	60	8	12	1400	2800	112	380	Triple	55,400.
RT60TAL	60	8	12	1400	2800	135	410	Triple, becket	64,800.
RT60VL	60	8	12	1400	2800	160	214	fiddle	35,800.
RT60VAL	60	8	12	1400	2800	187	245	fiddle, becket	39,400.
RT60ML	60	8	12	1400	2800	120	210	stand-up	32,000.
RT60RL	60	-	12	1400	2800	100	160	deckblock	20,400.
RT60RDL	60	-	12	925	1850	100	260	deckblock	33,700.
RTSh60SL	60	-	12	1400	2800	100	160	single	20,400.
RTSh60DL	60	-	12	1400	2800	100	260	double	38,900.
RTSh60GL	60	-	12	1400	2800	100	115	tear drop	20,400.

RT=regata S=single Sh=streap head SA=single and becket D=double DA=double and becket T=triple TA=triple and becket V=fiddle VA=fiddle and becket
M=stand-up R=cheek RD=double cheek G=tear drop L=low load

RT60 HIGH LOAD

型番	シーブ径	シャックル径	ロープ最大径	安全強度	破断強度	最大長	重量	形容	価格
	[mm]	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT60SH	60	8HR	12	1800	3600	112	180	single	25,300.
RT60SAH	60	8HR	12	1800	3600	135	210	single, becket	29,800.
RT60DH	60	8HR	12	1800	3600	112	280	double	47,600.
RT60DAH	60	8HR	12	1800	3600	135	310	double, becket	51,700.
RT60TH	60	8HR	12	1800	3600	112	380	Triple	64,000.
RT60TAH	60	8HR	12	1800	3600	135	410	Triple, becket	72,300.
RT60VH	60	8HR	12	1800	3600	160	214	fiddle	42,900.
RT60VAH	60	8HR	12	1800	3600	187	245	fiddle, becket	47,000.
RT60MH	60	8HR	12	1800	3600	120	210	stand-up	37,200.
RT60RH	60	-	12	1800	3600	100	160	deckblock	22,700.
RT60RDH	60	-	12	1800	3600	100	260	deckblock	37,700.
RTSh60SH	60	-	12	1800	3600	100	160	single	22,700.
RTSh60DH	60	-	12	1800	3600	100	260	double	43,200.
RTSh60GH	60	-	12	1800	3600	100	115	tear drop	22,700.

RT=regata S=single Sh=streak head SA=single and becket D=double DA=double and becket T=triple TA=triple and becket V=fiddle VA=fiddle and becket
M=stand-up R=cheek RD=double cheek G=tear drop H=high load

RT80 **LOW LOAD**

型番	シーブ径	シャックル径	ロープ最大径	安全強度	破断強度	最大長	重量	形容	価格
	[mm]	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT80SL	80	10	14	1850	3700	145	250	single	41,500.
RT80SAL	80	10	14	1850	3700	170	280	single, becket	46,400.
RT80DL	80	10	14	1850	3700	145	460	double	79,500.
RT80DAL	80	10	14	1850	3700	170	490	double, becket	83,300.
RT80TL	80	10	14	1850	3700	145	720	Triple	129,600.
RT80TAL	80	10	14	1850	3700	170	750	Triple, becket	134,400.
RT80VL	80	10	14	1850	3700	210	460	fiddle	70,900.
RT80VAL	80	10	14	1850	3700	240	490	fiddle, becket	48,700.
RT80ML	80	10	14	1850	3700	145	250	stand-up	46,700.
RT80RL	80	-	14	1850	3700	120	215	deckblock	38,100.
RT80RD	80	-	14	1220	2440	120	430	deckblock	66,600.
RTSh80SL	80	-	14	1850	3700	120	225	single	42,900.
RTSh80DL	80	-	14	1850	3700	120	430	double	82,300.
RTSh80GL	80	-	14	1850	3700	120	210	tear drop	43,200.

RT=regata S=single Sh=streak head SA=single and becket D=double DA=double and becket T=triple TA=triple and becket V=fiddle VA=fiddle and becket
M=stand-up R=cheek RD=double cheek G=tear drop L=low load

RT80 HIGH LOAD

型番	シーブ径	シャックル径	ロープ最大径	安全強度	破断強度	最大長	重量	形容	価格
	[mm]	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT80SH	80	10HR	14	2400	4800	145	250	single	51,500.
RT80SAH	80	10HR	14	2400	4800	170	280	single, becket	55,700.
RT80DH	80	10HR	14	2400	4800	145	460	double	94,200.
RT80DAH	80	10HR	14	2400	4800	170	490	double, becket	98,200.
RT80TH	80	10HR	14	2400	4800	145	720	Triple	152,800.
RT80TAH	80	10HR	14	2400	4800	170	750	Triple, becket	158,200.
RT80VH	80	10HR	14	2400	4800	210	460	fiddle	83,000.
RT80VAH	80	10HR	14	2400	4800	240	490	fiddle, becket	92,500.
RT80MH	80	10HR	14	2400	4800	145	250	stand-up	58,800.
RT80RH	80	-	14	2400	4800	120	215	deckblock	42,900.
RT80RDH	80	-	14	1590	3180	120	430	deckblock	74,000.
RTSh80SH	80	-	14	2400	4800	120	225	single	47,600.
RTSh80DH	80	-	14	2400	4800	120	430	double	91,300.
RTSh80GH	80	-	14	2400	4800	120	210	tear drop	48,100.

RT=regata S=single Sh=streak head SA=single and becket D=double DA=double and becket T=triple TA=triple and becket V=fiddle VA=fiddle and becket
M=stand-up R=cheek RD=double cheek G=tear drop H=high load

RT100 HIGH LOAD

型番	シーブ径	シャックル径	ロープ最大径	安全強度	破断強度	最大長	重量	形容	価格
	[mm]	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT100SH	100	10HR	16	3400	6800	203	570	single	73,500.
RT100SAH	100	10HR	16	3400	6800	241	641	single, becket	82,800.
RT100DH	100	12HR	16	3400	6800	227	1370	double	141,700.
RT100VH	100	10HR	16	3400	6800	297	752	fiddle	129,600.
RT100VAH	100	10HR	16	3400	6800	330	1030	Fiddle, becket	141,700.
RT100MH	100	10HR	16	3400	6800	203	570	stand-up	84,700.
RT100RH	100	-	16	3400	6800	160	520	deckblock	69,200.
RT100RDH	100	-	16	2245	4990	160	1015	deckblock	115,800.

RT125 / 150 HIGH LOAD

型番	シーブ径	シャックル径	ロープ最大径	安全強度	破断強度	最大長	重量	形容	価格
	[mm]	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT125SH	125	12HR	19	5000	10000	254	570	single	103,700.
RT125RH	125	-	19	5000	10000	190	641	deckblock	89,900.
RT150SH	150	16HR	25	6800	13600	305	1370	single	200,500.
RT150RH	150	-	25	6800	13600	210	752	deckblock	169,400.

RT=regata S=single Sh=streap head SA=single and becket D=double DA=double and becket T=triple TA=triple and becket V=fiddle VA=fiddle and becket
M=stand-up R=cheek RD=double cheek G=tear drop H=high load

RT **ULTRA**

型番	シーブ径	ロープ最大径	安全強度	破断強度	最大長	重量	形容	価格
	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT55U	55	14	1800	3600	71	93	single	32,900.
RT70U	70	14	2300	4600	90	165	single	51,900.
RT90U	90	16	3400	6800	116	375	single	77,800.
RT120U	120	16	5000	10000	160	741	single	120,100.

RT **ULTRA M**

型番	シーブ径	ロープ最大径	安全強度	破断強度	最大長	重量	形容	価格
	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT55UM	55	14	1800	3600	70	155	mast block	32,900.
RT70UM	70	14	2300	4600	88	290	mast block	51,900.
RT90UM	90	16	3400	6800	110	620	mast block	79,800.
RT120UM	120	16	5000	10000	150	1220	mast block	120,100.
RT55UM-T	55	22	1800	3600	70	242	mast block	36,300.
RT70UM-T	70	22	2300	4600	88	430	mast block	57,100.
RT90UM-T	90	28	3400	6800	110	977	mast block	85,600.
RT120UM-T	120	28	5000	10000	150	1930	mast block	132,200.
RT55UM-O	55	14	1800	3600	71	170	over the top	36,300.
RT70UM-O	70	14	2300	4600	89	300	over the top	57,100.
RT90UM-O	90	16	3400	6800	112	680	over the top	85,600.
RT120UM-O	120	16	5000	10000	155	1345	over the top	132,200.

RT=regata U=ultra M=mastbase T=tulip sheave O=over the top

RT **ULTRA** S

型番	シーブ径	ロープ最大径	安全強度	破断強度	高さ	重量	形容	価格
	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT55US	55	14	1800	3600	17	73	single sheave	29,400.
RT70US	70	14	2300	4600	17	130	single sheave	46,700.
RT90US	90	16	3400	6800	26	260	single sheave	70,000.
RT120US	120	16	5000	10000	26	584	single sheave	108,000.
RT55US-T	55	22	1800	3600	35	124	single tulip sheave	32,900.
RT70US-T	70	22	2300	4600	35	220	single tulip sheave	51,900.
RT90US-T	90	28	3400	6800	54	500	single tulip sheave	79,800.
RT120US-T	120	28	5000	10000	54	988	single tulip sheave	120,100.

RT=regata U=ultra S=single seave T=tulip sheave

RT EVE

型番	シーブ径	ロープ最大径	安全強度	破断強度	長さ	重量	形容	価格
	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT55V	55	12	3000	6000	77	160	single	-
RT77V	77	14	5000	10000	100	275	single	-
RT77VW	77	14	5000	10000	100	330	Single wide	-
RT100V	100	18	7500	15000	125	500	single	-
RT100VW	100	18	7500	15000	125	590	Single wide	-
RT125V	125	22	10000	20000	160	670	single	-
RT125VW	125	22	10000	20000	160	780	Single wide	-
RT150V	150	25	13000	26000	195	840	single	-
RT150VW	150	25	13000	26000	195	960	Single wide	-

Prices on demand

RT=regata V=eve W=wide sheave

RT EVE S

型番	シーブ径	ロープ最大径	安全強度	破断強度	長さ	重量	形容	価格
	[mm]	[mm]	[kg]	[kg]	[mm]	[g]		[¥]
RT55VS	55	12	3000	6000	25	165	single sheave	-
RT77VS	77	14	5000	10000	26	275	single sheave	-
RT100VS	100	18	7500	15000	36	380	single sheave	-
RT125VS	125	22	10000	20000	46	670	single sheave	-
RT150VS	150	25	13000	26000	56	820	single sheave	-
RT77VS-W	77	14	5000	10000	32	295	single wide sheave	-
RT100VS-W	100	18	7500	15000	42	450	single wide sheave	-
RT125VS-W	125	22	10000	20000	52	805	single wide sheave	-
RT150VS-W	150	25	13000	26000	62	850	single wide sheave	-
RT55VS-T	55	12	3000	6000	31	170	single tulip sheave*	-
RT 77VS-T	77	14	5000	10000	38	315	single tulip sheave*	-
RT 100VS-T	100	18	7500	15000	38	392	single tulip sheave*	-
RT125 VS-T	125	22	10000	20000	50	612	single tulip sheave*	-
RT150 VS-T	150	25	13000	26000	55	701	single tulip sheave*	-


Prices on demand

RT=regata V=eve S=single sheave W=wide sheave T=tulip sheave *=X-Bearing

T-BONE

TB-x ステンレス

型番	A	B	ø1	ø2	破断強度	重量	価格
	[mm]	[mm]	[mm]	[mm]	[kg]	[g]	[¥]
TB-3208-x	32	8	8	6	2600	10	1500.
TB-4510-x	45	10	10	8	4100	24	2200.
TB-5212-x	52	12	12	10	5900	40	2800.
TB-6014-x	60	14	14	12	8100	64	3200.
TB-6816-x	68	16	16	14	10600	130	4400.

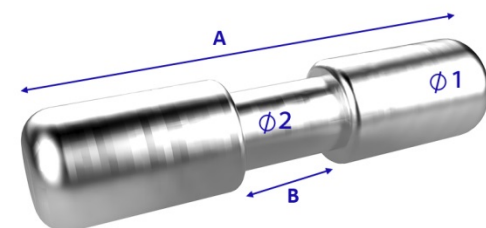

TB-TN チタン

型番	A	B	ø1	ø2	破断強度	重量	価格
	[mm]	[mm]	[mm]	[mm]	[kg]	[g]	[¥]
TB-3208-tn	45	25	10	8	4300	6	4400.
TB-4510-tn	52	12	12	10	6200	13	5600.
TB-5212-tn	60	14	13	12	8500	22	6400.
TB-6014-tn	68	16	16	14	11100	34	8700.

TB=T-Bone for textile connection X=stainless steel tn=titanium *=worst case condition